


ATTACH PANEL TO 2x LEDGER
BELOW W/ SIP FASTENERS @ 10"
O.C. OR 5 PER 4' PANEL WIDTH.
TYPICAL UNLESS OTHERWISE
NOTED. REQUIRED - MIN.
2" EMBEDMENT INTO 2x'S.

1x8 NAILER EMBEDDED IN PANEL
TO ALLOW FOR LEDGER ATTACHMENT.
SEE PANEL LAYOUTS FOR LOCATIONS.

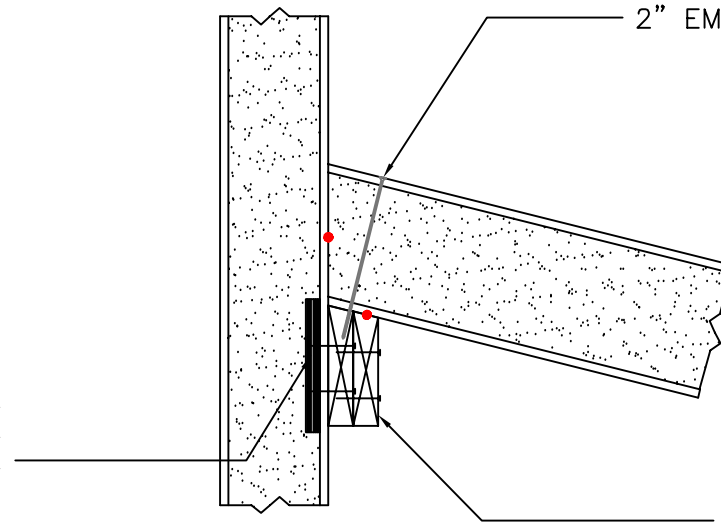


2x6 K.D. LEDGER ATTACHED TO WALL
PANEL TO ALLOW FOR ADEQUATE
LOWER ROOF SIP ATTACHMENT.

NOTE: ALL RED DOTS - APPLY CONTINUOUS
 $\frac{3}{8}$ " DIA. BEAD OF MASTIC SEALANT
BETWEEN 2x MEMBER & PANEL FOAM.

LOW ROOF CONNECTION @ SIP WALL

SCALE: 1" = 1'-0"



Foard
P A N E L
i n c o r p o r a t e d
P.O. Box 185 , West Chesterfield, NH 03466
(603) 256 - 8800