


ATTACH PANEL TO ADJACENT PANEL
W/ SIP FASTENERS @ 10" O.C.
OR 5 PER 4' PANEL WIDTH.
TYPICAL UNLESS OTHERWISE NOTED.

STUFF EXPOSED PANEL EDGE W/
CONT. BEVELED 2x MATERIAL.
SECURE OSB PANEL SKINS TO 2x
W/ 0.131" DIA. x 3¼" GALV.
NAILS @ 6" O.C. OR EQU.

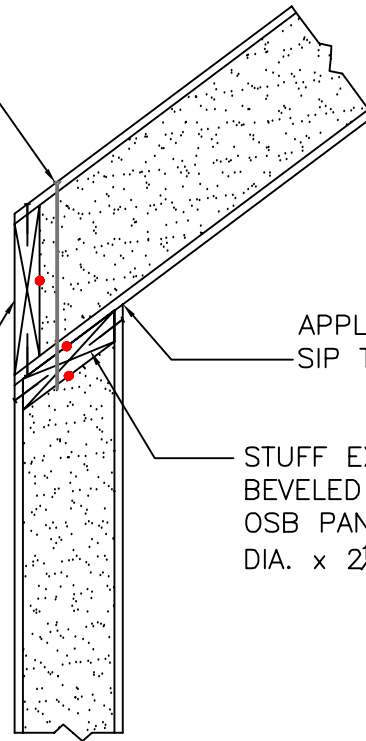


APPLY CORVUM 30/30
SIP TAPE @ INT. CORNER

STUFF EXPOSED PANEL EDGE W/ CONT.
BEVELED 2x BLOCKING MATERIAL. SECURE
OSB PANEL SKINS TO 2x W/ 0.131"
DIA. x 2½" GALV. NAILS @ 6" O.C. OR EQU.

NOTE: ALL RED DOTS – APPLY CONTINUOUS
¾" DIA. BEAD OF MASTIC SEALANT
BETWEEN 2x MEMBER & PANEL FOAM.

PLUMB CUT PANEL EAVE CONNECTION DETAIL

SCALE: 1" = 1'-0"



Foard
P A N E L
i n c o r p o r a t e d
P.O. Box 185 , West Chesterfield , NH 03466
(603) 256 - 8800