


ATTACH PANEL TO ADJACENT PANEL
W/ SIP FASTENERS @ 10" O.C.
OR 5 PER 4' PANEL WIDTH.
TYPICAL UNLESS OTHERWISE NOTED.

STUFF EXPOSED PANEL EDGE W/
CONT. 2x MATERIAL. SECURE OSB PANEL
SKINS TO 2x W/ 0.131" DIA. x 2½"
GALV. NAILS @ 6" O.C. OR EQU.

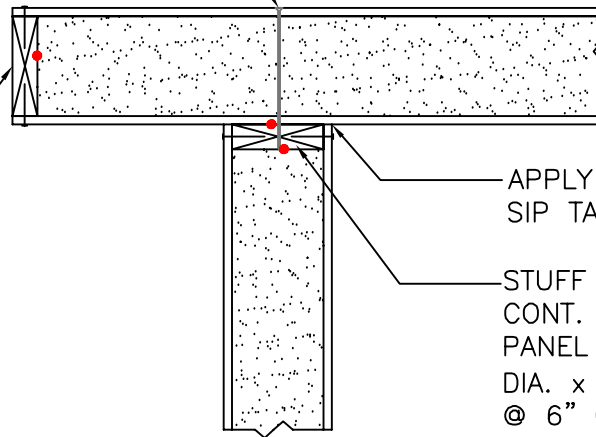


APPLY CORVUM 30/30
SIP TAPE @ INT. CORNER

STUFF EXPOSED PANEL EDGE W/
CONT. 2x MATERIAL. SECURE OSB
PANEL SKINS TO 2x W/ 0.131"
DIA. x 2½" LONG GALV. NAILS
@ 6" O.C. OR EQU.

NOTE: ALL RED DOTS - APPLY CONTINUOUS
3/8" DIA. BEAD OF MASTIC SEALANT
BETWEEN 2x MEMBER & PANEL FOAM.

PANEL RAKE CONNECTION DETAIL

SCALE: 1" = 1'-0"



Foard
P A N E L
i n c o r p o r a t e d
P.O. Box 185 , West Chesterfield , NH 03466
(603) 256 - 8800