


STUFF EXPOSED RIDGE W/ BEVELED LVL BLOCKING MATERIAL. ATTACH LVL'S TO EACH OTHER W/ SIPS SCREWS @ 10" O.C. OR 5 PER 4' PANEL WIDTH ACROSS THE ENTIRE RIDGE LENGTH.


SECURE OSB PANEL SKINS TO BEVELED LVL BLOCKING W/ 0.131" DIA. x 2½" GALV. NAILS @ 6" O.C. OR EQU.

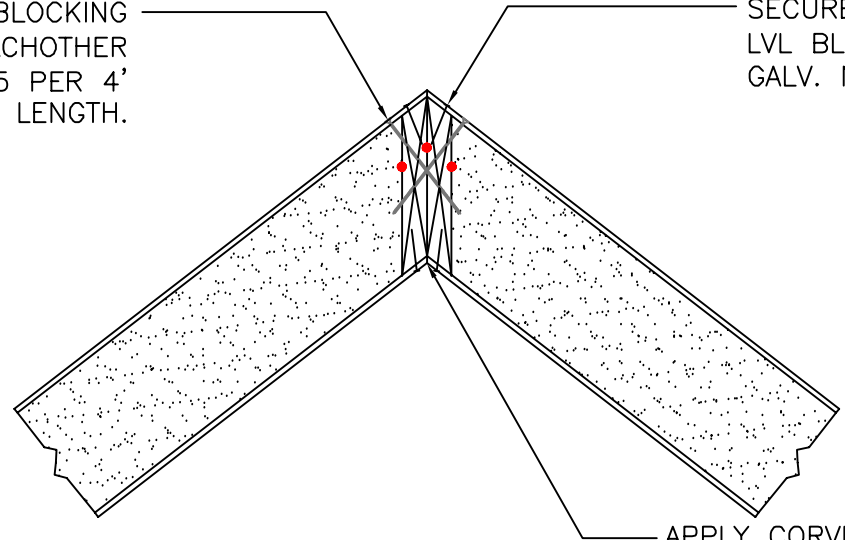

APPLY CORVUM 30/30 SIP TAPE @ INT. RIDGE

NOTE: ALL RED DOTS - APPLY CONTINUOUS 3/8" DIA. BEAD OF MASTIC SEALANT BETWEEN 2x MEMBER & PANEL FOAM.

STRUCTURAL RIDGE CONNECTION DETAIL  
SCALE: 1" = 1'-0"



**Foard**  
P A N E L  
i n c o r p o r a t e d  
P.O. Box 185 , West Chesterfield, NH 03466  
( 603 ) 256 - 8800