

NAIL BASE PANELS



Nail Base Panels (NB) are a high performance alternative to “wrap and strap” insulation and sheathing systems. They are non-load bearing insulated panels used on walls, and roofs in both residential and commercial buildings. Nail base panels provide the exterior sheathing and insulation in one unit.

Components & Features:

Exterior Skin:

7/16” thick, HUD-PS2-grade, Exposure 1, Oriented Strand Board

Core Material:

EPS: Expanded Polystyrene, 1.0 lb/cuft, 1 in. is R-3.8

XPS: Extruded Polystyrene, 1.6 lb/cuft, 1 in. is R-5.0

NEO: Neopor Polystyrene, 1.2 lb/cuft, 1 in. is R-4.5

PIR: Polyisocyanurate foam, 2.0 lb/cuft, 1 in. is R-5.7

Features:


- Reduces Heating and Cooling Costs
- Fast Installation Reduces Labor Costs
- Uses Renewable Wood
- Recycled / Recyclable Foam Insulation

Availability:

- 3.0 through 25.0 inches thick
- 4ft by 6, 7, 8, 9, 10, 12, 14, & 16ft
- Optional pre-cut services
- Optional embedded nailers
- Optional FSC Certified Skins
- Optional custom skins

Manufacturing & Quality Control:

Foard Panel manufacturing meets ICC-ES AC-10. Independent review and approval of procedures and plant operations by registered, third party, ISO Guide 65/17065:2012 accredited inspection agency.

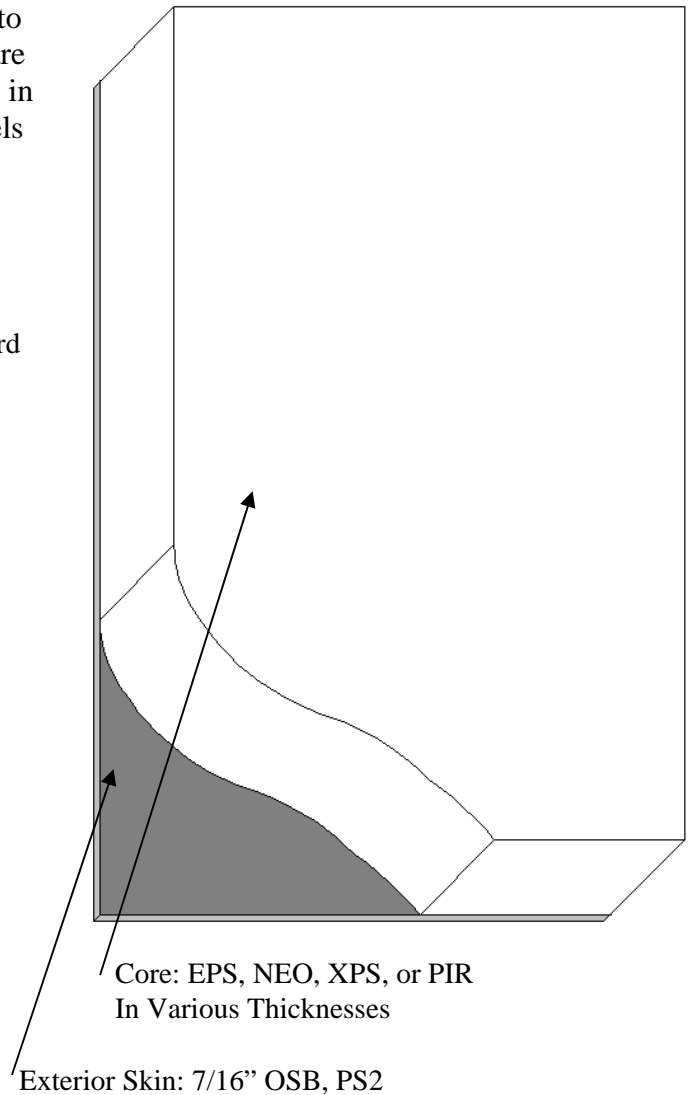

Exterior Skin: 7/16” OSB, PS2

Core: EPS, NEO, XPS, or PIR
In Various Thicknesses

20 Year Limited Warranty:

Foard Panel Inc. warrants to the buyer that Foard Panels will not delaminate in normal use as the result of a defect in materials or manufacturing for 20 years from the date of purchase. See full warranty for details.

NAIL BASE PANELS



SIP Properties at Standard Thicknesses

Overall Thickness (in)	2.50	4.00	6.00	7.25	9.75	11.75	
Core Thickness (in)	2.00	3.63	5.63	7.38	9.38	11.38	
EPS	R-Value @75°	8	14	22	29	37	44
	R-Value @40°	8.9	16	24	32	40	48
	Permeance (perm)	1.11	0.82	0.62	0.51	0.42	0.36
	Weight (lb/sqft)	1.6	1.7	1.9	2.0	2.2	2.3
	Size Availability 4ft Widths	4, 5, 6, 7, 8, 9, 10, 12, 14, and 16ft					
XPS	R-Value	11	19	29	37	47	57
	Permeance (perm)	0.67	0.43	0.30	0.24	0.19	0.16
	Weight (lb/sqft)	1.7	1.8	2.1	2.3	2.6	2.9
	Size Availability 4ft Widths	4, 5, 6, 7, 8, 9, 10, 12, 14, and 16ft					
Neo	R-Value @75°	10	17	26	34	44	52
	R-Value @40°	10	18	28	36	46	55
	Permeance (perm)	1.00	0.71	0.52	0.43	0.35	0.30
	Weight (lb/sqft)	1.6	1.7	1.9	2.0	2.2	2.4
	Size Availability 4ft Widths	4, 5, 6, 7, 8, 9, 10, 12, 14, and 16ft					
PIR	R-Value	12	22	34	44	55	67
	Permeance (perm)	0.40	0.24	0.16	0.13	0.10	0.08
	Weight (lb/sqft)	1.7	2.0	2.3	2.6	3.0	3.3
	Size Availability 4ft Widths	4, 5, 6, 7, 8, 9, 10, 12, 14, and 16ft					

NAIL BASE PANELS



SIP Core Properties						
		Test Method	EPS	NEO	XPS	PIR
General	Density (lb/cuft)	ASTM D1622 or C303	1.0 ⁵	1.2 ⁴	1.6	2.0
	Dimensional Stability (% Change)	ASTM D2126	2 ³	2	2	2
	Max. Custom SIP Thickness (in.)	-	25.00	25.00	12.25	12.25
Thermal	R-Value of 1 inch thickness (75 °F)	ASTM C518	3.8 ³	4.5 ²	5.0	5.7
	R-Value of 1 inch thickness (40 °F)	ASTM C518 or C578	4.2 ³	4.8 ²	5.4	-
	U-Value of 1 inch thickness (75 °F)	ASTM C518	0.26 ³	0.22 ²	0.20	0.17
	U-Value of 1 inch thickness (40 °F)	ASTM C518 or C578	0.24 ³	0.21 ²	0.19	-
Strength	Compressive 10% Deformation (lbs/sqin)	ASTM D1621 or C165	10	13	20	20
	Permeability (perm inches)	ASTM E96	5.0 ³	3.5 ⁴	1.5	<1.0
	Absorption (% volume)	ASTM C272	4.0 ³	3.0 ⁴	0.3	<1.0
	Max. Service Temperature (°F)	ASTM D3278	160	165 ⁵	190 ⁷	250
Fire Characteristics	Rating	-	Class I	Class I	Class I	Class I
	Smoke Developed	E84	125	250 ²	165	220 ⁸
	Flame Spread	E84	15	25 ²	5	50 ⁸
	Toxicity of Combustion Products	Same as wood or Cardboard				

¹ Hunter Panel. Accessed, 5/26/2013. http://www.hpanels.com/images/stories/pdfs/tech_bulls/Hunter_Recycled_Content.pdf

² ICC-ES ESR 3463. Accessed 5/26/2013 http://www.icc-es.org/reports/pdf_files/ICC-ES/ESR-2784.pdf

³ ASTM International Standards (2006). ICC. pp659-662. West Conshohocken, PA

⁴ BASF Technical Leaflet, February 2012.

http://www.plasticsportal.net/wa/EU-en_GB/Catalog/ePlastics/doc4/BASF/PRD/30060740/.pdf?title=&asset_type=ti/pdf&language=EN&urn=urn:documentum:

⁵ BASF Safety Data Sheet: Styropor BF-222. Revised June 2007, Version 2.1.

⁶ BASF Safety Data Sheet: Neopor 2200. Revised February 2011, Version 2.0.

⁷ Dow Material Safety Data Sheet: Styrofoam 4x48 Inch Panel Coare 20 WN Extruded Polystyrene Foam Insulation. Issued January 2012.

⁸ Hunter Panel Technical Department, October 31, 2014.