


ROOF CONNECTION #1

(DATE: 11-11-2014)

ATTACH PANEL TO ADJACENT PANEL
W/ SIP FASTENERS @ 10" O.C.
OR 5 PER 4' PANEL WIDTH.
TYPICAL UNLESS OTHERWISE NOTED.

DRILL BIT SIP FASTENERS @
10" O.C. OR 5 PER 4' OF PANEL

2x BLOCKING ATTACHED
TO STEEL. 3" THICK MIN.
BLOCKING BY OTHERS.

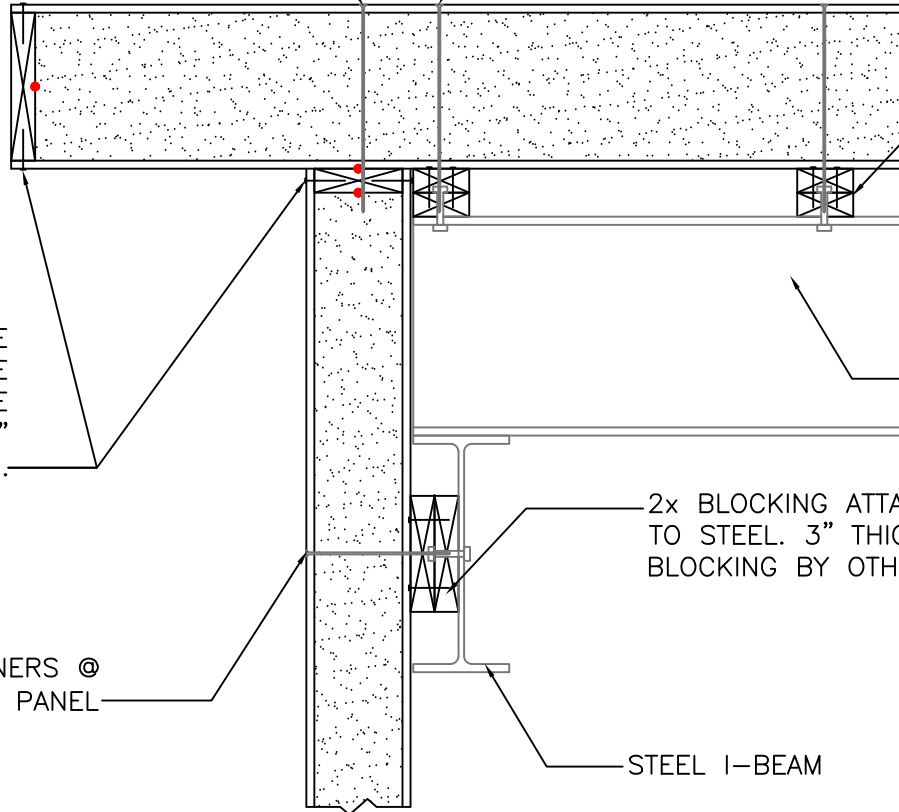

STUFF EXPOSED PANEL EDGE
W/CONT. 2x MATERIAL. SECURE
OSB PANEL SKINS TO EDGE
BLOCKING W/ 0.131" x 2 1/2"
GALV. NAILS @ 6" O.C. OR EQU.

STEEL I-BEAM


2x BLOCKING ATTACHED
TO STEEL. 3" THICK MIN.
BLOCKING BY OTHERS.

DRILL BIT SIP FASTENERS @
10" O.C. OR 5 PER 4' OF PANEL

STEEL I-BEAM

NOTE: ALL RED DOTS - APPLY CONTINUOUS
3/8" DIA. BEAD OF MASTIC SEALANT
BETWEEN 2x MEMBER & PANEL FOAM.

ROOF CONNECTION - TYPE #1
SCALE: 1" = 1'-0"



Foard
P A N E L
i n c o r p o r a t e d
P.O. Box 185, West Chesterfield, NH 03466
(603) 256-8800